


# Xerox® VersaLink® C7000 Colour Printer

The VersaLink C7000 Colour Printer is built on Xerox® ConnectKey® Technology. For more information, go to [www.connectkey.com](http://www.connectkey.com).

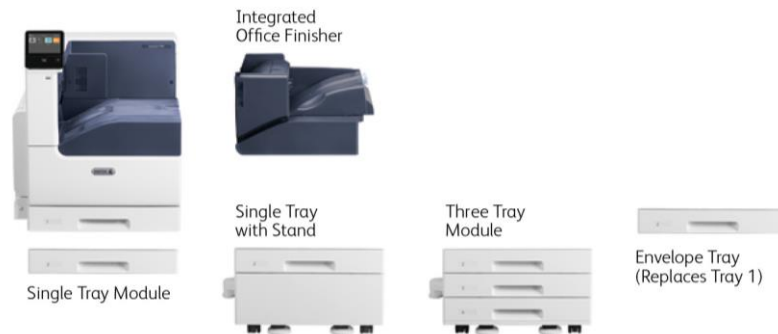

System Specifications	VersaLink C7000N	VersaLink C7000DN
<b>One-Sided Speed</b> A4 / 210 x 297 mm A3 / 297 x 420 mm	Up to 35 ppm (pages per minute) long edge feed (LEF) Up to 19 ppm	
<b>Two-Sided Speed</b> A4 / 210 x 297 mm A3 / 297 x 420 mm	NA	Up to 35 ppm (pages per minute) LEF Up to 13 ppm
<b>Monthly Duty Cycle<sup>1</sup></b>	Up to 153,000 pages / month <sup>1</sup>	
<b>Recommended Average Monthly Print Volume<sup>2</sup></b>	Up to 10,000 pages	
<b>Hard Drive</b>	320 GB HDD (Optional)	
<b>Processor</b>	1.05 GHz Dual-Core	
<b>Memory</b>	2 GB	
<b>Connectivity</b>	Ethernet 10/100/1000 Base-T, High-speed USB 3.0, Wi-Fi 802.11n/g/b/a and Wi-Fi Direct with optional Wi-Fi Kit (concurrent wired and wireless connections supported), NFC Tap-to-Pair	
<b>Controller Features</b>	Configuration Cloning, Xerox Extensible Interface Platform®, Xerox App Gallery, Xerox® Standard Accounting, Network Accounting Enabled, Role Based Permissions, Convenience Authentication Enabled, Online Support (accessed from the user interface and print driver)	
<b>User Interface Languages</b>	English, French, Italian, German, Spanish, Brazilian Portuguese, Russian, Dutch, Swedish, Danish, Finnish, Norwegian, Greek, Turkish, Polish, Czech, Hungarian, Romanian, Catalan, Ukrainian, Croatian	
<b>Device Specifications</b>		
<b>Electrical Requirements</b>		
<b>Europe and Other Geographies</b>	Voltage: 220-240V +/- 10 % Frequency: 50 Hz +/- 3 %, 8A	

## Xerox® VersaLink® C7000 Colour Printer

Power Consumption				
Printing <sup>3</sup>	1.6 kWh			
Standby Mode <sup>3</sup>	94 Watts or less			
Sleep Mode <sup>3</sup>	1.4 watts or less			
Operating Environment				
Required Temperature Range (Storage)	0° to 35° C			
Required Temperature Range (Operating)	10 to 32° C			
Required Relative Humidity	10 % to 85 %			
Sound Power Levels	Printing: 6.75 B(A) or less Standby: 4.10 B(A) or less  <b>Full System (including finisher)</b> Printing: 7.52 B(A) Standby: 4.10 B(A)			
Sound Pressure Levels	Printing: 52.5 dB(A) Standby: 26.0 dB(A)  <b>Full System (including finisher)</b> Printing: 60.0 dB(A) Standby: 26.0 dB(A)			
Boot Time (from Off to UI Ready)	As fast as 98 seconds			
Warm-up Time (from Sleep to UI Ready)	As fast as 12 seconds			
Dimensions and Weight (Unpackaged)	Width	Depth	Height	Weight
Base Unit	590 mm	670.8 mm	637 mm	54.3 kg
Base Unit with Single Tray with Stand Module	615.7 mm	670.8 mm	1118.6 mm	77.6 kg
Base Unit with Three Tray Module	615.7 mm	670.8 mm	1118.6 mm	81.8 kg
Base Unit with Three Tray Module and Integrated Office Finisher	615.7 mm	670.8 mm	1118.6 mm	97.6 kg
Certifications				
To view the latest list of certifications, go to <a href="http://www.xerox.com/OfficeCertifications">www.xerox.com/OfficeCertifications</a> .				
Print				
First-print-out Time	As fast as 7.6 seconds Colour			
	As fast as 5.1 seconds Black			
Print Resolution	Up to 1200 x 2400 dpi			
Page Description Languages	Adobe® PostScript® 3™ PCL® 5e, 6 PDF XPS TIFF JPEG HP-GL			
Maximum Print Area	4 mm from lead edge of paper, 2 mm from Side and Trail edges of paper			

## Xerox® VersaLink® C7000 Colour Printer

<b>Print Features</b>	<ul style="list-style-type: none"> <li>Application Defaults</li> <li>Banner Pages Enable / Disable</li> <li>Bi-directional Real-time Status</li> <li>Booklet Layout</li> <li>Colour Adjustments (lightness, contrast, saturation, colour balance)</li> <li>Colour Correction</li> <li>Draft Mode</li> <li>Finishing (requires finishing)</li> <li>Fit to new paper size</li> <li>Job Identification (Print ID or Banner, Print ID in margins on first page only or all pages)</li> <li>Job Monitoring (Client or Local User Interface)</li> <li>N-up Page Layout (up to 16 pages per sheet)</li> <li>Paper Selection by Attribute</li> <li>Personal Print</li> <li>Print Around Enable / Disable</li> <li>Print from USB</li> <li>Run Black</li> <li>Sample Set</li> <li>Saved Job</li> <li>Scaling</li> <li>Secure Print</li> <li>Skip Blank Pages</li> <li>Special Pages (exception page programming: covers, inserts, exceptions pages)</li> <li>Store and Recall Driver Settings</li> <li>Stored Jobs Deletion</li> <li>Two-sided Printing (as default – DN configuration)</li> <li>Watermark (predefined and custom)</li> <li>Xerox® Earth Smart Driver Settings</li> </ul>
<b>Print from USB</b>	<ul style="list-style-type: none"> <li>Allows walk-up printing from Type A USB port</li> <li>Supports direct printing from computer via Type B USB port</li> <li>Supported file formats: PDF, JPEG, TIFF, XPS, PDF/A</li> </ul>
<b>Operating Systems</b>	<ul style="list-style-type: none"> <li>Windows® 7, 8, 8.1, 10</li> <li>Windows Server 2008 SP2, Server 2008 R2 SP1, Server 2012, Server 2012 R2, Server 2016</li> <li>macOS® 10.11, 10.12, 10.13</li> <li>Citrix®</li> <li>Redhat® Enterprise Linux®</li> <li>Fedora Core</li> <li>IBM® AIX®</li> <li>HP-UX®</li> <li>Oracle® Solaris</li> <li>SUSE®</li> <li>SAP®</li> </ul> <p>Note: For information about supported versions for the above operating systems, please visit our Drivers &amp; Downloads page and specify your device at <a href="http://www.support.xerox.com">www.support.xerox.com</a>.</p>
<b>Fonts</b>	<ul style="list-style-type: none"> <li>PostScript fonts: 136</li> <li>PCL fonts: 83</li> </ul>
<b>Xerox® Mobile Express Driver®</b>	<p>Makes it easy for mobile users to find, use and manage Xerox® and non-Xerox® devices in every new location. Plug into a new network, and Mobile Express Driver automatically discovers available printers and provides status and capability information. Save a list of “favourite” printers for each location, store application print settings for use on any printer in any network, and greatly reduce mobile support calls to IT.</p>
<b>Xerox® Global Print Driver®</b>	<p>A truly universal print driver that lets IT administrators install, upgrade and manage Xerox® and non-Xerox® devices from a single driver. It provides a consistent, easy-to-use interface for end-users, reducing the number of support calls, and simplifying print services management.</p>
<b>Xerox® Pull Print Driver</b>	<p>Makes it easy for IT managers to qualify, deploy and manage all print devices using a single driver in a Pull Print environment. Uses a single queue and single driver. The Xerox® Pull Print Driver extends convenience across a broad range of printing assets. IT administrators no longer need to manage and configure multiple drivers. Used in conjunction with Equitrac Office®, Ysoft® SafeQ®, Pharos® and others.</p>

## Xerox® VersaLink® C7000 Colour Printer

Mobile Solutions and Mobile Device Apps	
<b>Apple® AirPrint®</b>	Print email, photos and important office documents directly from an Apple iPhone® or iPad® with no drivers to install and no cables to connect. With AirPrint, an iPhone or iPad automatically locates and connects to the AirPrint-enabled device over the office Wi-Fi network.
<b>Google Cloud Print™</b>	Google Cloud Print connects print devices to the web, enabling users to print the applications they use every day from smartphones, tablets, Chromebook™ notebook computers and any other web-connected device.
<b>@PrintByXerox</b>	@PrintByXerox is a free service that allows secure printing from any email-enabled device (computer, phone, tablet, iOS, Android™, Google® Chromebook™ and more) to a Xerox® printer or MFP using a single email address with no IT intervention. No training is needed. End-users simply send attachments to the email address, and release them at the MFP panel.
<b>Xerox® Print Service Plug-in for Android™ (Free at Google Play™ Store)</b>	The Xerox® Print Service Plug-in for Android KitKat (4.4 or greater) devices streamlines mobile printing without third-party apps or additional print drivers. You can easily print photos, Web pages and documents when your mobile device is connected to printers using a wireless network. A robust print option set includes two-sided printing, stapling and secure code release. A free download is available from the Google Play™ store.
<b>Xerox® Print Management and Mobility Suite, Xerox® Print Management and Mobility Service</b>	Xerox® Print Management and Mobility Suite is a modular set of workflows designed to save customers time and money by providing effective control over their print fleet, while enabling worker productivity and mobility through a set of robust workflows. Xerox enables ultimate customer flexibility by offering these capabilities in both an on-premises server version and with a cloud based-version of this solution.
Software Solutions	
<b>Xerox® ConnectKey® Apps (Found at the Xerox® App Gallery)</b>	Increase user productivity by simplifying and shortening everyday tasks. Unlike traditional software, ConnectKey Apps do not require a dedicated server, PC or IT resource. Instead, simply download these lightweight, serverless ConnectKey Apps to the device.
Security	
<b>Security Features</b>	<ul style="list-style-type: none"> <li>Access Controls</li> <li>AES 256-bit Encryption</li> <li>Audit Log</li> <li>Certificate Path Validation</li> <li>Certificate Revocation List (CRL)/Status Protocol (OCSP)</li> <li>Detection of external programme falsification (XCP Plug-in)</li> <li>Cisco® Identity Services Engine (ISE) Integration</li> <li>Domain Filtering</li> <li>FIPS 140-2</li> <li>Firmware Verification</li> <li>Immediate Disk Overwrite*</li> <li>IP Address Filtering</li> <li>IPsec</li> <li>Network Authentication</li> <li>Port Filtering</li> <li>Pre-installed Self-Signed Certificates</li> <li>Role Based Permissions</li> <li>Secure Print</li> <li>Security Certificate Management</li> <li>Smart Card Enablement (CAC/PIV/.NET)</li> <li>SNMPv3</li> <li>Status Protocol (OCSP)</li> <li>TLS/SSL</li> </ul> <p>*Requires HDD/Productivity Kit</p>

# Xerox® VersaLink® C7000 Colour Printer

Accounting	
<b>Xerox® Standard Accounting / Network Accounting (Standard)</b>	
<b>Tracking</b>	Print usage
<b>Accounting</b>	<p>Xerox® Standard Accounting Tool            Up to 1,000 User Accounts without HDD            Up to 9,999 User Accounts with HDD            Up to 500 General accounts</p> <p>Network Accounting (Job Based Accounting)            Up to 1,000 User IDs; Up to 1,000 Account IDs without HDD            Up to 60,000 User IDs; Up to 60,000 Account IDs with HDD            Up to 14,000 accounting records (transactions)</p>
<b>Features</b>	Administrator can manage the feature via the Embedded Web Server.
<b>Accounting Options – Network Accounting (Allows central server to manage all accounting)</b>	
	<ul style="list-style-type: none"> <li>Enhanced network accounting with up to the minute data on how the system is being used</li> <li>Comprehensive management and enterprise scale tracking and reporting of device print usage</li> <li>Numerous solutions are available through Xerox Alliance Partners. For details visit <a href="http://www.xerox.com">www.xerox.com</a></li> <li>Security enhancements include simultaneous support for HTTP/HTTPS protocols</li> <li>Device requests account authentication from third party server enabling larger databases of users and accounts</li> <li>Accept Authentication Login at control panel and pass to third party Networking Account</li> </ul>
Paper Handling	
<b>Bypass Tray</b>	
<b>Capacity<sup>4</sup></b>	100 sheets
<b>Sizes</b>	Custom sizes: 88.9 x 98.4 mm to 297 x 431.8 mm
<b>Weights</b> One-sided: Two-sided:	60 to 216 gsm 60 to 169 gsm
<b>Types</b>	Bond Plain Paper Cardstock Custom Envelopes Hole Punched Labels Heavyweight Labels Letterhead Lightweight Cardstock Lightweight Glossy Cardstock Lightweight Glossy Cardstock Reload Pre-Printed Recycled
<b>Tray 1</b>	
<b>Capacity<sup>4</sup></b>	520 sheets
<b>Sizes</b>	Custom sizes: 139.7 x 182.0 mm to 297.0 x 431.8 mm
<b>Weights</b> One-sided: Two-sided:	60 to 256 gsm 60 to 169 gsm

## Xerox® VersaLink® C7000 Colour Printer

<b>Types</b>	Bond Plain Paper Cardstock Custom Hole Punched Labels Heavyweight Labels Extra Heavyweight Labels Letterhead Lightweight Cardstock Lightweight Glossy Cardstock Lightweight Glossy Cardstock Reload Heavyweight Cardstock Pre-Printed Recycled
<b>Single Tray Module (Optional)</b>	
<b>Capacity<sup>4</sup></b>	520 sheets
<b>Sizes</b>	Custom sizes: 139.7 x 182.0 mm to 297.0 x 431.8 mm
<b>Weights</b> One-sided: Two-sided:	60 to 256 gsm 60 to 169 gsm
<b>Types</b>	Bond Plain Paper Cardstock Custom Hole Punched Labels Heavyweight Labels Extra Heavyweight Labels Letterhead Lightweight Cardstock Lightweight Glossy Cardstock Lightweight Glossy Cardstock Reload Heavyweight Cardstock Pre-Printed Recycled
<b>Single Tray Module with Stand (Optional)</b>	
<b>Capacity<sup>4</sup></b>	520 sheets
<b>Sizes</b>	Custom sizes: 139.7 x 182.0 mm to 297.0 x 431.8 mm
<b>Weights</b> One-sided: Two-sided:	60 to 256 gsm 60 to 169 gsm
<b>Types</b>	Bond Plain Paper Cardstock Custom Hole Punched Labels Heavyweight Labels Extra Heavyweight Labels Letterhead Lightweight Cardstock Lightweight Glossy Cardstock Lightweight Glossy Cardstock Reload Heavyweight Cardstock Pre-Printed Recycled

## Xerox® VersaLink® C7000 Colour Printer

Three Tray Module (Optional)	
<b>Capacity<sup>4</sup></b>	Tray 2: 520 sheets Tray 3: 520 sheets Tray 4: 520 sheets
<b>Sizes</b>	Custom sizes: 139.7 x 182.0 mm to 297.0 x 431.8 mm
<b>Weights</b> One-sided: Two-sided:	60 to 256 gsm 60 to 169 gsm
<b>Types</b>	Bond Plain Paper Cardstock Custom Hole Punched Labels Heavyweight Labels Extra Heavyweight Labels Letterhead Lightweight Cardstock Lightweight Glossy Cardstock Lightweight Glossy Cardstock Reload Heavyweight Cardstock Pre-Printed Recycled
Envelope Tray – Replaces Tray 1 (Optional)	
<b>Capacity<sup>4</sup></b>	Up to 60 envelopes
<b>Sizes</b>	Monarch, DL, C5 Custom sizes: 98 x 148 mm to 162 x 241 mm
<b>Weights</b>	75 to 90 gsm
Total Capacity	
<b>Base Unit Capacity<sup>4</sup></b>	620 sheets
<b>Single Tray Module Capacity<sup>4</sup></b>	1,140 sheets
<b>Single Tray Module with Stand Capacity<sup>3</sup></b>	1,140 sheets
<b>Three Tray Module Capacity<sup>4</sup></b>	2,180 sheets
Finishing	
Output Trays	
<b>Center Output Catch Trays</b>	500 sheets; tray offsets
Integrated Office Finisher (Optional)	
<b>Stacking Tray</b>	500 sheets of 80 gsm – A4 or 250 sheets of 80 gsm – A3
<b>Sizes</b>	89 x 98 mm to 297 x 432 mm
<b>Weights</b>	60 to 220 gsm
<b>Stapling</b>	Single Auto stapling: 50 sheets maximum: A4 / B5-size sheets (less than 90 gsm or (2) 220 gsm covers) 30 sheets maximum: A3 / B4-size sheets (less than 90 gsm or (2) 220 gsm covers)
Device Management	
<b>Network Protocols</b>	TCP/IP: HTTP/HTTPS, Internet Printing Protocol, LPR/LPD, Raw Socket Printing/Port 9100, IPv4/IPv6, WSD, LDAP, Bonjour® / AirPrint™ Most protocols not in use can be disabled
<b>Administrative Protocols</b>	DHCP, SNMP, WINS, HTTP, HTTPS, TLS, SNTP, MDNS

## Xerox® VersaLink® C7000 Colour Printer

Xerox® CentreWare® Web	
	<ul style="list-style-type: none"> <li>• A Web-based server application for network administrators that permits web browser-based device management from any workstation, whether running Windows or UNIX or any other operating system</li> <li>• Works with any SNMP-managed printer from any manufacturer</li> <li>• Provides help with device discovery and installations, health checks and troubleshooting, and device upgrades, as well as basic accounting and asset management</li> </ul>
Xerox® Embedded Web Server – Integrated Device Web Page	
<b>Device Status</b>	<ul style="list-style-type: none"> <li>• Tray status/contents</li> <li>• Consumables status</li> <li>• Billing/Usage</li> <li>• Quick Links</li> <li>• Online Support</li> </ul>
<b>Print Queue Viewing</b>	Job print queue management—view and delete
<b>Job Submission</b>	Print-ready files (PS, PCL, PDF, XPS, JPEG)
<b>Device Administration</b>	Allows simple, remote installation setting of configuration options and management of the device
<b>Browsers</b>	Microsoft® Internet Explorer® Microsoft Edge™ Mozilla™ Firefox® Apple® Safari® Google Chrome™
Remote Services	
<b>Automated Meter Reading (AMR)</b>	Automates the process of collecting and submitting meter reads for tracking and billing of Xerox® device usage. Eliminates the need for time-consuming end-user involvement and ensures that meter reads are submitted to Xerox on time.
<b>Automated Supplies Replenishment (ASR)</b>	Automatically orders supplies for Xerox output devices based on actual usage, eliminating the need to manually manage supplies inventory.
<b>MaintenanceAssistant</b>	Offers a fast (and free) way to resolve potential issues and receive assistance and automate the troubleshooting/repair process. Diagnostic data is sent to Xerox®, allowing for problems to be solved faster with increased uptime.
What's In The Box	
	<ul style="list-style-type: none"> <li>• VersaLink C7000 Colour Printer</li> <li>• Starter Capacity Print Cartridge: One of each (Cyan, Magenta, Yellow: 3,300 print capacity<sup>5</sup>, Black: 5,300 print capacity<sup>5</sup>)</li> <li>• Imaging Drum – One of each (Cyan, Magenta, Yellow, Black: 82,200 print capacity)<sup>7</sup></li> <li>• Quick Use Guide</li> <li>• Quick Install Guide</li> <li>• Software and Documentation CD (with Drivers, User Manual, System Admin. Guide and Warranty Statement)</li> <li>• Power Cord</li> </ul>



# Xerox® VersaLink® C7000 Colour Printer

Supplies and Accessories	Quantity	Part Number
<b>Supplies</b>		
<b>Standard Capacity Toner Cartridges</b>	Cyan: 3,300 standard pages <sup>5</sup> Magenta: 3,300 standard pages <sup>5</sup> Yellow: 3,300 standard pages <sup>5</sup> Black: 5,300 standard pages <sup>5</sup>	106R03764 106R03763 106R03762 106R03761
<b>High Capacity Toner Cartridges</b>	Cyan: 10,100 standard pages <sup>5</sup> Magenta: 10,100 standard pages <sup>5</sup> Yellow: 10,100 standard pages <sup>5</sup> Black: 10,700 standard pages <sup>5</sup>	106R03760 106R03759 106R03758 106R03757
<b>CMYK Drum Cartridge</b>	82,200 standard pages <sup>6</sup>	113R00782
<b>Waste Toner Bottle</b>	21,200 standard pages <sup>6</sup>	115R00129
<b>Fuser</b>	220V Fuser	115R00138
<b>Staple Refills for Finishers (3 refills per container)</b>	15,000 staples (5,000 each refill)	008R12941
<b>Staple Cartridge for Finishers (1 cartridge per container)</b>	5,000 staples (5,000 each cartridge)	008R12964
<b>Accessories / Options</b>		
<b>Single Tray Module (does not include stand)</b>		097S04910
<b>Single Tray with Stand Module</b>		097S04907
<b>Three Tray Module</b>		097S04908
<b>Envelope Tray (This replaces Tray 1)</b>		497K17720
<b>Integrated Office Finisher</b>		097S04911
<b>HDD (320 GB hard drive) (Optional)</b>		497K17740
<b>Wireless Network Adapter Kit</b>		497K16750
<b>Internal Card Reader / RFID Kit</b>		Various
<b>Unicode Printing Kit</b>		320S00291

<sup>1</sup> Maximum volume capacity expected in any one month. Not expected to be sustained on a regular basis.

<sup>2</sup> Expected regular monthly throughput.

<sup>3</sup> Power states defined per ENERGY STAR® Programme requirements for Imaging Equipment.

<sup>4</sup> Paper capacities are based on 75 gsm stock; capacities will vary with different weight stocks.

<sup>5</sup> Average standard pages. Declared Yield in accordance with ISO/IEC 19798. Yield will vary based on image, area coverage and print mode.

<sup>6</sup> Approximate pages. Declared yield will vary depending on job run length, media size/orientation and machine speed. For more information visit: <http://www.office.xerox.com/latest/SUPGL-01.pdf>.

[www.xerox.com](http://www.xerox.com)

Configurations vary by geography.

